



**Hood
Distribution**

PRODUCT CATALOG



OUR LEGACY

Hood Distribution's roots trace back to the 19th century when George McQuesten and Wooster McEwen founded separate lumber companies that processed and delivered lumber across New England and the Southeastern United States.

Through hard work and a solid reputation for quality, both companies endured two world wars, a major economic depression, and growing competition from foreign imports. Not only did they survive, but they thrived—expanding their footprints and upgrading their technologies to stay ahead of the times.

Our parent company – Hood Industries, Inc. began as a plywood and lumber manufacturing company. Hood Industries entered the distribution space in 1995 with the acquisition of McEwen Lumber, followed by the purchase of McQuesten Lumber in 1998. These two foundational acquisitions not only expanded Hood's reach into key markets but also laid the groundwork for what would become Hood Distribution. They shaped the company's long-term growth strategy, leading to additional acquisitions and the development of greenfield branches across the country. Today, Hood Distribution continues to build on that momentum, with a growing network of locations focused on delivering quality products and exceptional service.

OUR OPERATIONS

Hood Distribution operates through three regional groups, each uniquely positioned to serve its market. In the Southern Region, thirteen branches offer a full range of hardwood lumber and related products, with a focus on cabinet shops and industrial customers. The Eastern Region, anchored by three branches in the Northeast, supports wholesale and retail lumber yards across New England. The Great Lakes Region was established through Hood's most recent acquisition—Distributor Service Inc. (DSI)—a respected wholesale distributor serving cabinet and woodworking manufacturers. This strategic addition brought seven successful locations into the Hood Distribution network, significantly expanding our reach and capabilities.

1983

Hood Industries
Mississippi

1995

McEwen Lumber Co.
Eastern United States Acquisition

1996

Louisville
Kentucky Greenfield

1998

McQuesten Lumber Co.
New England Acquisition

1998

Southwest Hardwoods
Arizona Acquisition



2017

**Leonard
Lumber**

*Durham, CT
Acquisition*

2018

Birmingham

*Alabama
Greenfield*

2022

Baltimore

*Maryland
Greenfield*

2023

**Distributor
Service, Inc.**

*Midwest
Acquisition*

2024

**Dallas-Fort
Worth**


*Texas
Greenfield*

This brochure highlights a wide array of products tailored to the specialty millwork, commercial and residential cabinetry, and furniture manufacturing industries. Additionally, select branches supply retail lumber dealers with mouldings, S4S boards, sheet goods, and related products. We continually seek opportunities to expand our product offerings to add value and meet the evolving needs of our customers.

For decades, our customers have relied on us as a trusted source for quality products and exceptional service. By prioritizing customer satisfaction and fostering strong partnerships, we have earned recognition as a vendor of choice in our industry. Hood Distribution's 23 branches have access to each other's inventory, allowing us to efficiently supply customers with the products they need. We take pride in being a dependable resource and a company that is both easy and desirable to do business with.

We sincerely appreciate our customers and look forward to developing long-term, mutually beneficial relationships.

Visit hooddistribution.com to explore more resources for product and technical information, an industry glossary, links to trade associations and suppliers, and much more.

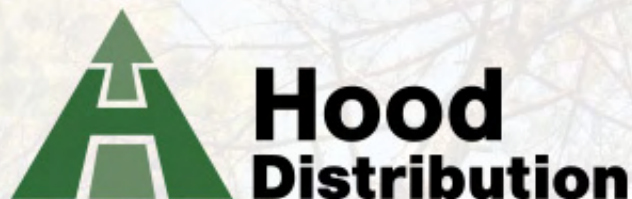

SOFTWOOD – LUMBER	6-12
Eastern White Pine	7
Douglas Fir.....	8
Western Red Cedar	9
Timber Sizing	10
Conversion Chart	11-12
WOOD FLOORING & DECKING.....	13-16
Decking & Flooring.....	14-15
Decking & Fastening Systems	16
SIDING & RAILING.....	17-19
Siding & Railing Solutions.....	18
Railing	19
SHINGLES	20-21
Shingles.....	21
ENGINEERED WOOD PRODUCTS.....	22-25
Engineered Wood.....	23
Installation & Structural	24
Technical Support & Design	25
HARDWOOD LUMBER.....	26-33
Hardwood S4S Boards	27
Moulding	28
Domestic.....	29-30
Import.....	31-32
Grades	33
PLYWOOD & COMPOSITE PANELS	34-35
Columbia Forest Products	35
BRANCH INFORMATION.....	BACK COVER

SOFTWOOD LUMBER



Photo courtesy of Durgin & Cronin

EASTERN WHITE PINE

Eastern White Pine has been a staple of American craftsmanship for centuries — from Colonial-era homes to today's custom interiors. Abundant throughout the Northeastern United States, this species has long been celebrated for its light weight, fine grain, and easy workability. Whether used for paneling, siding, trim, or furniture, Eastern White Pine brings a classic warmth and charm that never goes out of style.

Thanks to its consistent quality and wide availability, Eastern White Pine remains a favorite among builders, designers, and millworkers. The species is available in a variety of grades — from C Select to Premium and Industrial — and is well-suited to both structural and decorative applications.

This wood is graded and regulated by the Northeastern Lumber Manufacturers Association (NELMA), which has maintained trusted grading standards since 1933. Whether you're working on new construction or restoring historic architecture, you can trust that Hood Distribution's Eastern White Pine meets the highest quality expectations.

To learn more about grading standards and additional profiles, visit www.nelma.org.

For a full list of our stocked Eastern White Pine products, visit www.HoodDistribution.com

Stocked Boards

- 1x4 through 1x12 S4S C Select
- 5/4x4 through 5/4x12 S4S C Select
- 1x4 through 1x12 S4S D&Btr Select
- 5/4x4 through 5/4x12 S4S D&Btr Select
- 1x4 through 1x12 in Premium and Standard
- 1x4 through 1x12 S1S2E in Standard and Premium

Available Patterns

- ECB: 1x6 and 1x8 in Premium and Standard
- WP4: 1x6 and 1x8 in Premium; 1x4 through 1x10 in Standard
- Pattern 105: 1x6 and 1x8 in Premium and Standard
- Shiplap: 1x6 through 1x12 in both Premium and Standard
- Channel: 1x8 and 1x10 Standard
- WP11: 1x6 through 1x10 Standard
- Bevel Siding: 1/2x6 and 1/2x8 Premium
- Log Cabin Siding: 2x8 Standard

All patterns and S1S2E options are available in either rougherhead or bandsawn textures.



ENHANCE BY DURGIN & CROWELL

Enhance is a premium line of Eastern White Pine paneling from Durgin & Crowell, featuring a factory-applied, UV-cured finish that brings out the wood's natural beauty while saving time on the jobsite. Designed for ease and efficiency, Enhance arrives ready to install — no sanding, staining, or sealing required — eliminating days of finishing work and reducing mess during construction.

The key to Enhance's superior quality lies in both the wood and the finish. Only Durgin & Crowell's high-grade Eastern White Pine is used, ensuring a uniform, attractive base. It is then coated using Asure®, a state-of-the-art UV curing process that delivers a harder, more durable finish than conventional site-applied coatings — all without introducing harmful VOCs into the home.

Every board is precision sanded, vacuum coated for even coverage, and cured instantly under UV light, resulting in a smooth, scratch-resistant surface that's easy to clean and built to last.

Enhance is available in a variety of tones to suit any interior style — including Natural, White Wash, Almond and Grey — and in multiple profiles and dimensions for flexibility across residential and commercial applications.

Product Specs

- Profiles: WP4 and ECB
- Widths: 1x6 and 1x8
- Lengths: 8' to 16', random even lengths
- Colors: Natural, White Wash, Almond

www.durginandcrowell.com



DOUGLAS FIR

Douglas Fir is one of North America's most versatile and widely used softwoods, known for its strength, dimensional stability, and signature warm, rosy color. Its exceptional performance and appealing grain pattern make it a favorite for both structural and finish applications — from framing and timbers to interior millwork.

Sourced primarily from the Pacific Northwest, Douglas Fir is naturally stable, drying well in position and maintaining its shape over time. It machines smoothly with power tools and finishes beautifully, especially when vertical grain cuts are used. The grain structure not only enhances aesthetics but also increases resistance to wear and movement, making it an ideal choice for flooring, cabinetry, and architectural elements.

At Hood Distribution, we stock a comprehensive range of Douglas Fir products, including green and kiln-dried stock, S4S dimensional lumber, rough timbers, and clear vertical grain uppers. We also offer specialty items such as Free of Heart Center (FOHC) and Free of Wane material, as well as structural grades like Select Structural and #1 & Better.

Available Stock

Kiln-Dried S4S Stock:

- 2x4 to 2x12: #1&Btr, Select Structural, #2&Btr
- 4x4 and 4x6: #2&Btr

Kiln-Dried Clear Mixed Grain (C&Btr):

- Ceiling and flooring in 5/8x4, 5/8x6
- Center Matched and S4S: 1x4 through 1x12, 2x2 through 2x12
- Stepping, eased edge, and mixed grain options available

Green Full Rough Timbers:

- Sizes range from 6x10 up to 12x12 and beyond, in lengths up to 32'
- Available in FOHC, Free of Wane, and Free of Heart Center upon request

Green S4S Stock:

- Select sizes in 2x10 and 2x12 up to 32'
- Special-order stock includes beams and larger dimension timbers in #2&Btr



Douglas Fir's impressive strength-to-weight ratio, dimensional stability, and attractive grain pattern make it one of the most reliable and versatile softwoods available. It is widely used in structural framing, exposed beams, and heavy timbers, where both performance and aesthetics are critical. Its straight grain and ability to take stain and finish well also make it a top choice for architectural millwork, trim, flooring, and cabinetry. Whether you're constructing a timber frame home, building a custom staircase, or fabricating casework, Douglas Fir delivers the strength, beauty, and consistency professionals rely on.

DOUGLAS FIR CLEAR UPPERS

Our Douglas Fir Clear Uppers represent the highest visual grade available, offering a clean, refined look for architectural and interior finish applications. The C&Btr grade includes both clear and nearly clear stock and is available in vertical grain, flat grain, or a mixed grain blend when not otherwise specified.

This material is ideal for flooring, paneling, trim, cabinetry, and other fine woodworking projects where aesthetics and consistency matter. It machines and finishes exceptionally well, showcasing the wood's natural rosy hue and tight grain. This collection is ideal for projects requiring both strength and beauty — whether it's detailed millwork or high-end interiors.

Available C&Btr Products Include:

Ceiling Stock:

- 5/8x4 and 5/8x6 – Mixed Grain and Vertical Grain

Flooring & Interior Trim:

- 1x4 Center Matched Flooring – Mixed or Vertical Grain
- 5/4x4 Center Matched Flooring – Mixed or Vertical Grain

S4S Boards:

- 1x4 through 1x12 – Vertical Grain
- 2x2 through 2x12 – Vertical Grain
- 4x4, 4x6, 6x6 – Mixed Grain
- 5/4x4 through 5/4x8 – Vertical Grain
- 5/4x12 – Stepping, Mixed Grain
- 1x4 S4S Eased Edge – Vertical Grain

For technical information, visit:

www.warpa.org | www.stimsonlumber.com | www.cdlumber.com

More product details at www.HoodDistribution.com



WESTERN RED CEDAR

Western Red Cedar is one of the most trusted wood species for exterior and interior applications. Its natural resistance to decay, dimensional stability, and rich red tone make it ideal for siding, paneling, decking, and custom outdoor structures. Easy to work with and beautiful to finish, Cedar delivers a blend of performance and design flexibility unmatched by manufactured alternatives.

Sourced from responsibly managed forests in the Pacific Northwest and British Columbia, Hood Distribution's Western Red Cedar is available in both Clear and Knotty grades to suit architectural and rustic aesthetics alike. Clear grades are typically air-dried and valued for their smooth appearance and minimal defects, while knotty grades offer a more natural, character-rich look.

Western Red Cedar is available in a variety of surface textures including S4S (Surfaced Four Sides), Rougher Headed, and Saw Textured to align with different project styles and finish requirements. Larger timbers and specialty patterns are available by special order.

Stocked Patterns (Kiln-Dried, 8'-16')

- Shiplap: 1x6, 1x8, 1x10 (STK & Premium)
- WP4-V4E: 1x4, 1x6, 1x8 (STK, A&Btr)
- Channel Rustic: 1x8, 1x10 (STK)
- Bevel Siding: 11/16x6, 11/16x8 (STK)

Boards & Dimension Lumber (KD, 8'-20')

- S1S2E Boards (Clear VG, A&Btr, C&Btr, STK)
- 1x4 through 1x12
- 5/4x4 through 5/4x12
- S4S EE Dimension
- 2x4 through 2x12: A&Btr, C&Btr, Arch Knotty
- 4x4, 4x6, 6x6: STK, D&Btr, C&Btr

Decking

- 5/4x6: KD PTL (Pressure Treated) and KD R/L (C&Btr), lengths from 8' to 20'



WESTERN RED CEDAR TIMBERS

Cedar timbers are stocked in a wide range of sizes and grades, ideal for pergolas, porches, structural framing, and outdoor accents.

- Clear S4S: 4x4, 4x6, 6x6, 3x8-4x12 (8'-20')
- Clear Rough: 4x4 up to 12x20 (select sizes)
- Knotty S4S & Rough: 4x4, 6x6, 6x8, 8x8, 8x10, 8x12 (8'-24')
- Custom milling and oversized timbers are available upon request.

Accessories

- Turned Porch Posts: 4x4x54" and 4x4x96"
- Newel Posts (Ball Top): 4x4x54"
- Moulded & Combo Handrails: 2x4 in 8' and 12' lengths
- Spindles and Balusters: 2x2 in 36", 42", 48", and 96"

To explore textures, grades, and finishing details, visit: www.realcedar.org | www.HoodDistribution.com



TIMBER SIZING

At Hood Distribution, we offer custom milling solutions that bring flexibility and speed to your Douglas Fir and Cedar timber projects. Whether you're working with our stock material or supplying your own, our on-site milling capabilities allow us to remanufacture timbers to your exact specifications — with fast lead times and dependable results.

Our facilities are equipped to handle various timber sizes with precision, using advanced equipment like the Stetson-Ross Timber Sizer and Baker Model D Resaw. These machines allow us to surface, resize, and resaw timbers with exceptional accuracy, up to 16" x 24" in a single pass.

AVAILABLE MILLING SERVICES

Rough Timbers to S4S:

We can surface rough timbers down to standard dimensional lumber with square edges and smooth faces. Note that due to size variations, minor skip dressing may occur — where blades miss small surface areas.



Rough Clean Faces:

For a cleaner rustic aesthetic, we can resaw slabs from one to four faces of rough timbers, exposing fresh rough-cut surfaces while retaining the natural character of the remaining sides.



Clean & Bright:

We begin with S4S stock and dress it down an additional 1/4" to ensure an ultra-smooth, uniform surface, eliminating any remaining rough patches or inconsistencies. This process is ideal for finish-grade material.



Custom Sizing (Rough or S4S):

We can resaw and surface standard stock into special sizes to fit unique project needs — whether it's to match existing millwork or to meet structural or aesthetic goals.




Standard Tongue & Groove:

We offer milling to a standard single tongue and groove profile (without v-groove), great for flooring, ceiling boards, and custom wall cladding.



Packaging:

Every order is carefully wrapped and labeled with protective corners and shrink wrap (when possible) to ensure it arrives in job-ready condition.

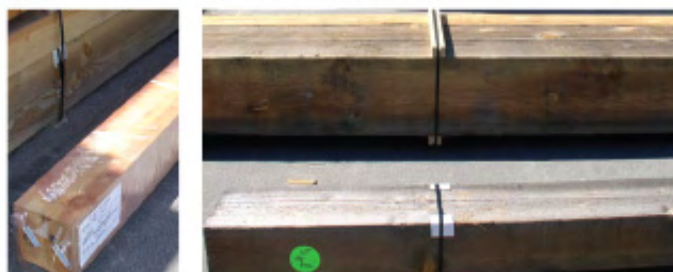

Please note: Once the material has been remanufactured, there is no guarantee of grade, appearance, or structural value. Additionally, we do not offer milling for pressure-treated lumber, reclaimed material, or previously installed wood due to safety and equipment compatibility.

For milling inquiries or technical support, please contact your local Hood Distribution branch or visit www.HoodDistribution.com

CONVERSION CHART

CONVERSIONS FROM LINEAL FEET TO BOARD FEET IN STANDARD SIZES OF WESTER LUMBER

Board Measure Equivalents

This table, based on Standard Nominal Sizes (from 1x2 to 8x24) has been developed by Western Wood Products Association as an aid to: (a) determine lineal (linear) feet per 1000 board feet and (b) find the equivalents between lineal and board feet. The common lengths between 6' and 16' are tabulated in the table; a formula is provided for calculating other lengths. The table can be used when dollar amounts are added, as the basis of converting: (a) cost per 1000 board feet to cost per lineal foot, or (b) cost per piece. Refer to the rest of the additional information and examples of how to use the table to solve problems. Actual dressed (surfaced), green and dry sizes are included for reference; however, **nominal sizes are always used for board footage calculations**. When using the table, start with the NOMINAL SIZES column. Read to the left for lineal foot information. Read to the right for board foot information. For lengths, other than those tabulated, the formula for converting lineal feet to board feet is: $\frac{T \times W \times L}{12} = \text{BOARD FEET}$

12

USING THE TABLE

Explanation of Table Headings

Lineal Feet per 1000 Board Foot	Lineal Feet per Board Foot	Green Surfaced Size for more than 19% moist. content	NOMINAL SIZE	Dry Surfaced Size for 19% or less moist. content	Board Feet per Lineal Foot	BOARD FEET (rounded to the nearest 100th)					
						LENGTH					
						6'	8'	10'	12'	14'	16'
①	②	③	④	⑤	⑥	⑦					

- 1 - **LINEAL FEET PER 1000 BOARD FEET:** Lineal feet, in given size pieces, needed to equal 1000 board feet.
- 2 - **LINEAL FEET PER BOARD FEET:** The lineal feet, in give size pieces, needed to equal one board foot.
- 3 - **GREEN SURFACED SIZE FOR MORE THAT 19% MOISTURE CONTENT:** This is the actual (surfaced) size of unseasoned lumber which, by definition, has a moisture content in excess of 19%.
- 4 - **NOMINAL SIZE:** Is the standard size designation for lumber, used for convenience.
- 5 - **DRY SURFACED SIZE FOR 19% OR LESS MOISTURE CONTENT:** This is the actual (surfaced) size of air or kiln-dried, seasoned lumber which, by definition, has a moisture content of 19% or less.
- 6 - **BOARD FEET PER LINEAL FOOT:** The number of board feet per one foot of length, in a given size.
- 7 - **BOARD FEET:** The columns in this section give board footages for corresponding lengths and sizes. Lengths are given from 6' to 16', in 2' increments. Sizes are read from the NOMINAL SIZES in the middle of the table.

	Lineal Feet per 1000 Board Foot	Lineal Feet per Board Foot	Green Surfaced Size for more than 19% moist. content	NOMINAL SIZE	Dry Surfaced Size for 19% or less moist. content	Board Feet per Lineal Foot	BOARD FEET (rounded to the nearest 100th)					
							LENGTH					
							6'	8'	10'	12'	14'	16'
BOARDS	6000'	6.0000'	Surfaced Dry Only	1 x 2	3/4 x 1 1/2"	0.1667	1	1.33	1.67	2	2.33	2.67
	4000	4.0000		1 x 3	3/4 x 2 1/2	0.2500	1.50	2	2.50	3	3.50	4
	3000	3.0000		1 x 4	3/4 x 3 1/2	0.3333	2	2.67	3.33	4	4.67	5.33
	2000	2.0000		1 x 6	3/4 x 5 1/2	0.5000	3	4	5	6	7	8
	1500	1.5000		1 x 8	3/4 x 7 1/4	0.6667	4	5.33	6.67	8	9.33	10.67
	1200	1.2000		1 x 10	3/4 x 9 1/4	0.8333	5	6.67	8.33	10	11.67	13.33
	1000	1.0000		1 x 12	3/4 x 11 1/4	1.0000	6	8	10	12	14	16
	857	0.8571		1 x 14	3/4 x 13 1/4	1.1667	7	9.33	11.67	14	16.33	18.67
DIMENSION LUMBER	3000	3.0000	1 9/16 x 1 9/10	2 x 2	1 1/2 x 1 1/2	0.3333			3.33	4	4.67	5.33
	2000	2.0000	1 9/16 x 2 9/10	2 x 3	1 1/2 x 2 1/2	0.5000			5	6	7	8
	1500	1.5000	1 9/16 x 3 9/10	2 x 4	1 1/2 x 3 1/2	0.6667			6.67	8	9.33	10.67
	1000	1.0000	1 9/16 x 5 9/8	2 x 6	1 1/2 x 5 1/2	1.0000			10	12	14	16
	750	0.7500	1 9/16 x 7 1/2	2 x 8	1 1/2 x 7 1/4	1.3333			13.33	16	18.67	21.33
	600	0.6000	1 9/16 x 9 1/2	2 x 10	1 1/2 x 9 1/4	1.6667			16.67	20	23.3	26.67
	500	0.5000	1 9/16 x 11 1/2	2 x 12	1 1/2 x 11 1/4	2.0000			20	24	28	32
	429	0.4288	1 9/16 x 13 1/2	2 x 14	1 1/2 x 13 1/4	2.3333			23.33	28	32.67	37.33
	1333	1.3333	2 9/16 x 2 9/10	3 x 3	2 1/2 x 2 1/2	0.7500	4.50	6	7.50	9	10.50	12
	1000	1.0000	2 9/16 x 3 11/16	3 x 4	2 1/2 x 3 1/2	1.0000	6	8	10	12	14	16
	667	0.6667	2 9/16 x 5 9/8	3 x 6	2 1/2 x 5 1/2	1.5000	9	12	15	18	21	24
	500	0.5000	2 9/16 x 7 1/2	3 x 8	2 1/2 x 7 1/2	2.0000	12	18	20	24	28	32
	400	0.4000	2 9/16 x 9 1/2	3 x 10	2 1/2 x 9 1/4	2.5000	15	20	25	30	35	40
	333	0.3333	2 9/16 x 11 1/2	3 x 12	2 1/2 x 11 1/4	3.0000	18	24	30	36	42	48
	286	0.2857	2 9/16 x 13 1/2	3 x 14	2 1/2 x 13 1/4	3.5000	21	28	35	42	49	56
	250	0.2500	2 9/16 x 15 1/2	3 x 16	2 1/2 x 15 1/4	4.0000	24	32	40	48	58	64
	750	0.7500	3 9/10 x 3 9/10	4 x 4	Surfaced Green Only	1.3333	8	10.67	13.33	16	18.67	21.33
	500	0.5000	3 9/10 x 5 5/8	4 x 6		2.0000	12	16	20	24	28	32
	375	0.3750	3 9/18 x 7 1/2	4 x 8		2.6667	16	21.33	26.67	32	37.33	42.67
	300	0.3000	3 9/15 x 9 1/2	4 x 10		3.3333	20	26.67	33.33	40	46.67	53.33
	250	0.2500	3 9/15 x 11 1/2	4 x 12		4.0000	24	32	40	48	56	64
	214	0.2143	3 9/18 x 13 1/2	4 x 14		4.6667	28	37.33	46.67	56	65.33	74.67
	188	0.1875	3 9/15 x 15 1/2	4 x 16		5.3333	32	42.67	53.33	64	74.67	85.33
	333	0.3333	5 1/2 x 5 1/2	6 x 6	Surfaced Green Only	3.0000	18	24	30	36	42	48
	250	0.2500	5 1/2 x 7 1/2	6 x 8		4.0000	24	32	40	48	56	64
	200	0.2000	5 1/2 x 9 1/2	6 x 10		5.0000	30	40	50	60	70	80
	167	0.1667	5 1/2 x 11 1/2	6 x 12		6.0000	36	48	60	72	84	96
	143	0.1429	5 1/2 x 13 1/2	6 x 14		7.0000	42	56	70	84	98	112
	125	0.1250	5 1/2 x 15 1/2	6 x 16		8.0000	48	64	80	96	112	128
	111	0.1111	5 1/2 x 17 1/2	6 x 18		9.0000	54	72	90	108	126	144
	100	0.1000	5 1/2 x 19 1/2	6 x 20		10.0000	60	80	100	120	140	160
HEAVY TIMBERS	188	0.1875	7 1/2 x 7 1/2	8 x 8	Surfaced Green Only	5.3333	32	42.67	53.33	64	74.67	85.33
	150	0.1500	7 1/2 x 9 1/2	8 x 10		6.6667	40	53.33	66.67	80	99.33	106.67
	125	0.1250	7 1/2 x 11 1/2	8 x 12		8.0000	48	64	80	96	112	128
	107	0.1071	7 1/2 x 13 1/2	8 x 14		9.3333	58	74.67	93.33	112	130.67	149.33
	94	0.0938	7 1/2 x 15 1/2	8 x 16		10.6667	64	85.33	106.67	128	149.33	170.67
	83	0.0833	7 1/2 x 17 1/2	8 x 18		12.0000	72	96	130	144	168	192
	75	0.0750	7 1/2 x 19 1/2	8 x 20		13.3333	80	106.67	133.33	180	186.67	213.33
	68	0.0682	7 1/2 x 21 1/2	8 x 22		14.6667	88	117.33	146.67	176	205.33	234.37
	63	0.0625	7 1/2 x 23 1/2	8 x 24		16.0000	96	128	160	192	224	256

BOARD FEET

WOOD FLOORING & DECKING



Photo courtesy of Nelson International

DARK RED MERANTI

Dark Red Meranti is prized by designers and architects for its smooth texture, rich red-brown hue, and exceptional surface quality. It mills cleanly, accepts finishes beautifully, and weathers evenly with minimal checking — all while offering greater affordability compared to heavier tropical hardwoods.

Our Meranti decking is kiln-dried, moulded to a high-end finish, and graded for appearance (Clear 1 Face & Better). Every shipment is carefully packaged and certified through the Malaysian Timber Certification Council (MTCC) — ensuring responsible forestry practices and third-party verification.

Decking Profiles:

- S4S EE: 1x4, 5/4x4, 5/4x6
- ECB: 1x4, 1x6
- Tongue & Groove: 1x4, 5/4x4, 1x6
- Prefinished Options Available

Boards & Dimension Stock:

- 1x6 through 1x12 S4S
- 2x4 through 2x12 S4S
- 5/4x8 through 5/4x12 S4S

Accessories:

- 2x2 Balusters: 36", 48", 96"
- 4x4 Posts: 8', 10', 12'
- 2x4 Railings: 8', 12'
- Matching components for a complete system

WESTERN RED CEDAR

Western Red Cedar is one of the most trusted wood species for exterior and interior applications. Its natural resistance to decay, dimensional stability, and rich red tone make it ideal for siding, paneling, decking, and custom outdoor structures. Easy to work with and beautiful to finish, Cedar delivers a blend of performance and design flexibility unmatched by manufactured alternatives.

- 5/4x6: KD PTL (Pressure Treated) and KD R/L STK, lengths from 8' to 20'

ALASKAN YELLOW CEDAR

Known for its striking honey-yellow hue and straight grain, Alaska Yellow Cedar combines natural durability with workability. This species stands out for its rot and insect-resistant oils and tannins—making it ideal for demanding outdoor projects like docks, decks, and rails.

- 5/4x6: KD PTL (Pressure Treated) and KD R/L STK, lengths from 8' to 20'

PREMIUM RED BALAU

Selected from a specific Shorea species subgroup, Red Balau decking is known for its deep, reddish-brown tones, excellent hardness, and fine grain. Our material is carefully sourced to ensure consistency in appearance and performance, avoiding the variation seen in generic "Mahogany" offerings. Each board is kiln-dried, precision-milled, and easy to install — making Red Balau a favorite among professionals and DIYers alike.

Red Balau resists rot, decay, and insects naturally, and holds finishes evenly and deeply. It is available in all standard decking dimensions and matching accessories to complete your entire outdoor project.

Available Products:

- Standard decking sizes
- Tongue & groove patterns
- Prefinished options
- 2x2 balusters, 2x4 handrails, and 4x4 posts

TOREM EXTREME

Often called "Bulletwood," Torem Extreme is your best alternative to Ipe — delivering exceptional durability, dense grain, and deep, reddish-brown tones with occasional streaks. With physical properties rivaling Ipe, including a crushing strength of 17,330 psi and a Janka hardness of 2,842, this hardwood offers remarkable resistance to decay, fungi, and insects (Durability Class 2). Each board features four smooth surfaces, is kiln-dried and graded Clear 2 Face — Reversible, and weathers over time to a uniform gray patina.

Torem's fine to very fine texture results in a sleek finish when planed, and it contains little to no silica, making it workable with modern tools. Its combination of aesthetics, structural integrity, and durability makes it ideal for premium outdoor projects. Pre-drilling is recommended for best installation results.

Available Products:

- KD 1x4 S4SEE (8'–16')
- KD 5/4x6 S4SEE (8'–16')
- Seal-1 Edge Sealer



ASHTON LEWIS YELLOW PINE FLOORING

Manufactured with State-of-the-Art Machinery

- Steam Dried to approximately 12% moisture content
- 8-Head Weining moulder affords highest level milling and appearance
- Each individual bundle shrink wrapped with acclimation instructions

Superior Appearance and Strength Qualities

- | | | |
|-----------------------------|-----------------|----------------------|
| • 100% Southern Yellow Pine | 1x4 - 1x6 - 1x8 | C&Btr Kerfback |
| | 1x4 - 1x6 - 1x8 | #2 Select Hollowback |

For more detailed information: www.ashton-lewis.com



DOUGLAS FIR

1x4 Center Matched Flooring – Mixed or Vertical Grain

- 5/4x12 C&Btr Fir Treads



DECKING AND FASTENING SYSTEMS

Smart Systems for Superior Surfaces

Hood Distribution offers hidden fastening systems and advanced deck board technologies to give your project a clean look, long lifespan, and better performance.



HIDfast® Hidden Deck Fastening System

Say goodbye to slow, hands-and-knees installation. HIDfast is a patented, collated, stainless steel fastening system that delivers a fastener-free decking surface without the hassle of screws or clips. Unlike traditional hidden systems that require one-by-one fastening, HIDfast uses a pneumatic tool to drive collated stainless fasteners through the edge of the board — giving you unmatched speed, strength, and a flawless finished look.

Why Choose HIDfast?

- Installs up to 80% faster than standard screws — lay 8 boards (8') in just over 3 minutes
- Creates a smooth surface with no visible fasteners
- Prevents popped screws, surface cracks, and water intrusion
- Offers consistent spacing and secure board retention
- Compatible with hardwood, PVC, and composite decking

The HIDfast system includes a lightweight Decker Tool and a range of collated fastener types to match your decking material and spacing preference.

Fastener Options (175 pcs/box · 100 sq ft/box · 4 boxes/case)

- HF 2.SWG — 1/4" spacer
- HF 2.75TG — (standard fastener for tongue & groove)
- HF 3M — 3/16" spacer
- HF 3W — 1/4" spacer
- HF 3 — 1/8" spacer

EDGEfast® Fastening System

Place once. Shoot twice. The EDGEfast® system fastens both edges of square-edge PVC or wood decking boards in a single step — securing the deck to the joist while locking both edges in place. This innovative design eliminates lateral board movement and leaves a clean, fastener-free surface. It comes with interchangeable gap guides for precise board spacing: 0", 1/8", 3/16", 1/4", and custom gaps.

Key Benefits

- Fastens two board edges simultaneously for faster installs
- Prevents lateral movement and gapping over time
- Hidden fastener system for a smooth, barefoot-friendly surface
- Works with most PVC and square-edge wood decking
- Fastener spacing is consistent and tool-driven for accuracy

Fastener Options

- EF2.5SS — Stainless Steel (350 pcs/box · 100 sq ft/box)
- EF2.5EC — EDGEcoat Steel (350 pcs/box · 100 sq ft/box)



SIDING & RAILING



Photo courtesy of Everlast® Advanced Composite Siding

EVERLAST® ADVANCED COMPOSITE SIDING

Everlast® is a solid composite siding made from a proprietary mineral-polymer blend and finished with a durable, fade-resistant acrylic capstock. Unlike fiber cement or wood, Everlast won't swell, crack, rot, or require painting — making it a smart, low-maintenance choice for long-term curb appeal.

Available in two clapboard profiles (6-7/8" and 4-1/2"), Everlast® features Cedar-Touch® woodgrain embossing, a matte finish, and a proven EZStack® installation system for faster, cleaner installs. The planks cut easily with standard tools and accept many common trim accessories.

Key Features & Benefits:

- Authentic cedar-style appearance with low-gloss finish
- Solid extruded profile – strong, stable, and lightweight
- No wood fibers – moisture resistant and mold-proof
- No harmful silica dust during cutting
- Made in the USA
- 14 fade-resistant colors including Misty Taupe, Harbor Blue, Sand Dune, Slate
- Limited Lifetime Warranty + 25-year Fade Protection

Manufactured by Chelsea Building Products, a trusted U.S. innovator in composite and PVC building materials since 1975.

For installation guides, color charts, and technical specs: www.EverlastSiding.com



WESTERN HEMLOCK BEVEL SIDING

- 1/2x6 KD CVG Primed Solid
- 1/2x6 KD CVG PFJ

REDWOOD BEVEL SIDING

- 1/2x6 CVG All Heart Primed
- 1/2x6 Con Heart

EASTERN WHITE PINE

- ECB: 1x6 and 1x8 in Premium and Standard
- WP4: 1x6 and 1x8 in Premium; 1x6 through 1x10 in Standard
- Shiplap: 1x6 through 1x12 in both Premium and Standard
- Channel: 1x8 Standard
- T&G Nickle-Gap: 1x8 Standard
- Bevel Siding: 1/2x6 and 1/2x8 Premium
- Log Cabin Siding: 2x8 Standard

WESTERN RED CEDAR

- WP4-V4E: 1x6, 1x8 STK
- Channel Rustic: 1x8 STK
- Bevel Siding: 1/2x6, 1/2x8; CVG, PFJ, Smooth & Rough



RED CEDAR SPLIT RAIL FENCING

Rustic Hand Split Western Red Cedar Post & Rail is highly resistant to insects, fungus, rot and effects of moisture. It is split to preserve the natural beauty and texture that makes this fence so attractive.

Standard/Jumbo Split Corner Post
Standard/Jumbo Split End Post

Standard/Jumbo Split Line Post
Standard/Jumbo Split Rail 10'

Available in 2-hole or 3-hole posts.

FORTRESS® FE26 IRON RAILING

Fe26 is Fortress' signature pre-welded steel railing system — engineered for both beauty and brute strength. Designed to evoke the timeless look of wrought iron while incorporating modern manufacturing, Fe26 offers a clean, low-maintenance solution for residential, multi-family, and commercial projects. Each panel is made from pre-galvanized steel, then coated with Fortress' multi-layer e-coat and powder coat finish to resist rust, UV damage, and wear — making it an ideal choice for exposed decks, balconies, and staircases.



Why Choose Fe26?

- Pre-welded steel panels reduce field cutting and speed up installation
- Strongest residential railing in Fortress' lineup
- Designed for both horizontal and stair applications
- Patented brackets and easily adjustable panels
- Available in standard and custom lengths
- Backed by a limited lifetime warranty

Options & Accessories

- Colors: Black Sand (stock), Gloss Black, and Bronze (special order)
- Panel heights: 34", 40", and custom
- Post types: Surface mount, fascia mount, or embedded
- Gate kits, LED post caps, drink rail brackets, and Accent Top Rails available for added customization
- Fe26 can also be used in combination with Fortress' Harmony LED lighting or upgraded with a horizontal cable infill for a mixed-material design.

For specifications, color samples, and design inspiration: www.FortressBP.com

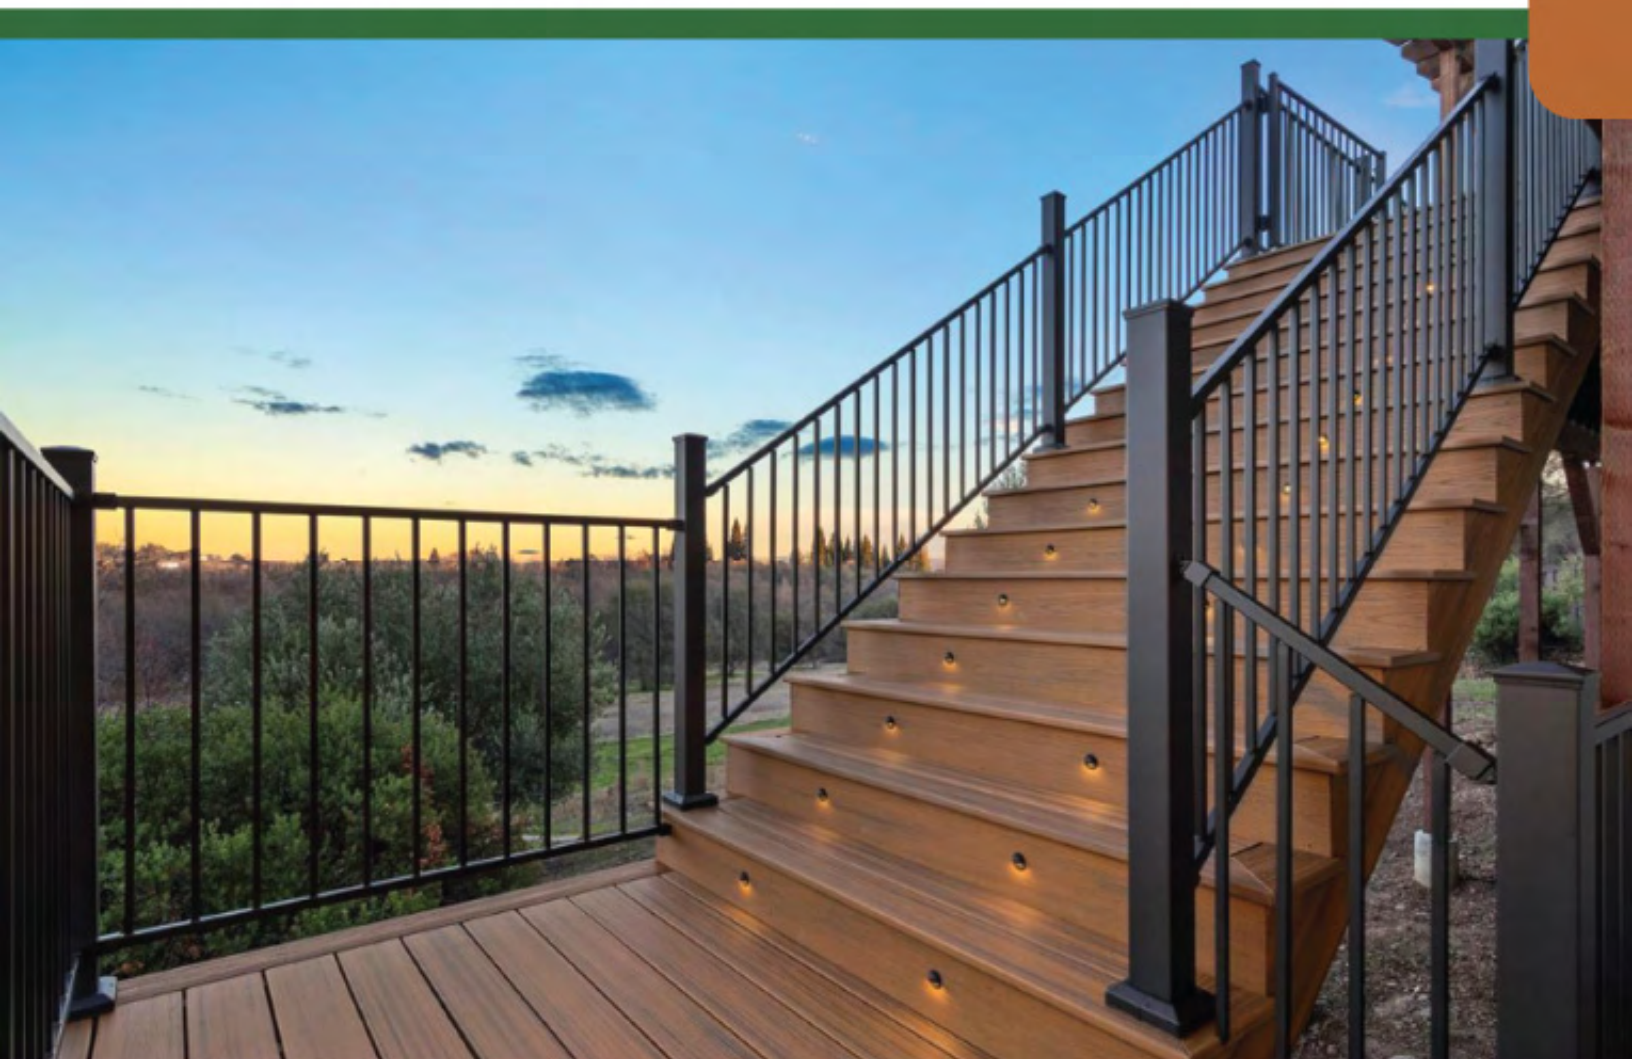

SHINGLES



EASTERN WHITE CEDAR SHINGLES

With its numerous properties (e.g. decay resistance, high insulation, lightness, etc.) white cedar (*thuya occidentalis*) is the ideal choice for roofing or exterior siding. Its natural oils protect against mold, moisture and insects, thereby ensuring a longer life. Cedar shingles age beautifully, even when left untreated. They enhance the beauty of a home while blending perfectly with other natural materials such as stone and brick.

SBC's High End Regular Eastern White Cedar Shingles features smoother Faces & Butts, wider shingles, 5" exposure, more consistent thicknesses and a consistent mill source.

Eastern White Cedar Shingles are available in four grades, each having its own distinctive features and applications:

Grade:	Characteristics:	Uses:
Extra "A"	Top Grade – No Imperfections	Roofing & Siding
Clear "B"	Select Grade – No imperfections on exposed surface (up to 6")	Siding
2nd Clear "C"	Economy grade. Some sound knots on exposed surface.	Siding (Rustic Appearance)
Utility "D"	Lowest Grade – Various imperfections	Multipurpose: undercourse, shims (10/10, shims)

1-1/2 Shims

10/10 Utility Undercourse

16" Extras, Clears, 2nd Clears and Extra R&R

Special Stain Colors available

For more detailed information: www.sbccedar.com



WESTERN RED CEDAR SHINGLES

Shingles and shakes produced from Western Red Cedar (*Thuja Plicata*) have long been the premier wood roofing material of North America. The majority of cedar roofs remain untreated and are known to provide excellent service.

NO. 1 Blue Label: The premium grade of shingles for roofs and sidewalls. These top-grade shingles are 100% heartwood, 100% clear and 100% edge-grain.

NO. 2 Red Label: A good grade for many applications. Not less than 10" clear on 16" shingles, 11" clear on 18" shingles and 16" clear on 24" shingles. Flat grain and limited sapwood are permitted in this grade.

NO. 1 Handsplit & Resawn: These shakes have split faces and sawn backs. Cedar logs are first cut into desired lengths. Blanks or boards of proper thickness are split and then run diagonally through a bandsaw to produce two tapered shakes from each blank.

NO. 1 Tapersplit: Produced largely by hand, using a sharp-bladed steel froe and a mallet. The natural shingle-like taper is achieved by reversing the block, end-for-end, with each split.

Certi-Guard Fire Retardant Cedar Shakes and Shingles:

No. 1 Certigrade shingles and No. 1 Certi-Split shakes are available pressure-impregnated with fire-retardants and meet testing standards developed by Underwriters Laboratories and adapted by the National Fire Protection Association. Certi-Guard may be used for Class A, B and C roof systems.

18" #1 R&R, #1 Perfections, #1 Pressure Treated Perfections, #1 Primed Gray

18" #2 R&R, #2 Perfections

24" 1/2-3/4 Medium Handsplits, 3/4-5/4 Heavy Handsplits



ENGINEERED WOOD PRODUCTS



Photo courtesy of Skanska Enso

INTERFOR I-JOISTS

The P3 Joist™ is an "I"-shaped engineered wood structural product designed for use in residential and commercial floor and roof construction.

P3 Joist™ products are prefabricated using SPF MSR lumber flanges and OSB web, which are bonded together with exterior-type adhesives. These products are identified by their depth, followed by their series name PJL, and by a designation - such as 40 - which relates to the joist's strength and stiffness. These products are manufactured to strict tolerances.

- All P3 Joist™ products are manufactured in conformance with ASTM D5055.
- Webs are OSB, classified as Exposure 1 or Exterior, and 3/8" in thickness or greater.
- All P3 Joist are assembled using exterior-type adhesives that meet ASTM D 2559 and ASTM D 7247.
- P3 Joist are available in seven depths: 9-1/2", 11-7/8", 14", 16", 18", 20" and 24".
- P3 Joist of the same depth are manufactured with various flange widths; flange width is an important design consideration when specifying hangers.
- P3 Joist are manufactured up to 64' in length. These lengths are cut to commonly used lengths such as 16' to 36' in 2' increments for jobsite delivery.

Stocking:

40 Series 2.5" Solid Sawn Flange x 9.5", 11.88", 14", & 16" Depths

80 Series 3.5" Solid Sawn Flange x 11.88", 14", & 16" Depths

Other Series and Depths are available upon request.



TRIMJOIST

TrimJoist® combines the advantages of an open-web floor truss with the versatility of a trimmable wooden joist.

As its name suggests, TrimJoist® can be cut to length on-site for a precise fit. Its open-web design gives subcontractors an efficient way to run electrical, plumbing, and HVAC systems through the floor system, while providing architects greater design flexibility.

Each joist features a 3.5-inch-wide nailing flange on both the top and bottom, helping ensure a solid, squeak-free floor when properly installed.

Stock availability varies between branches; call your local Hood Distribution Sales Representative for more information.


LAMINATED VENEER LUMBER (LVL)

Laminated veneer lumber (LVL) is a mass timber product that is twice as strong as steel in proportion to weight. It provides an ideal solution when strength, dimensional stability, and high load-bearing capacity are essential.

LVL is made from multiple veneers of strength graded dried wood bonded together in a factory-controlled environment. The versatility and proven structural performance of LVL have rapidly increased its popularity in mass timber construction.

LVL is suitable for use as beams, trusses, planks and rafters. When crossbonded for increased stiffness it can be used to form wall and floor panels with load-bearing capacity. While frequently used solely as a concealed structural component of a building, finished appearance grades are also used.

Brand availability varies by branch (Stora Enso, Tolko LSL). Call your local sales representative for more information.

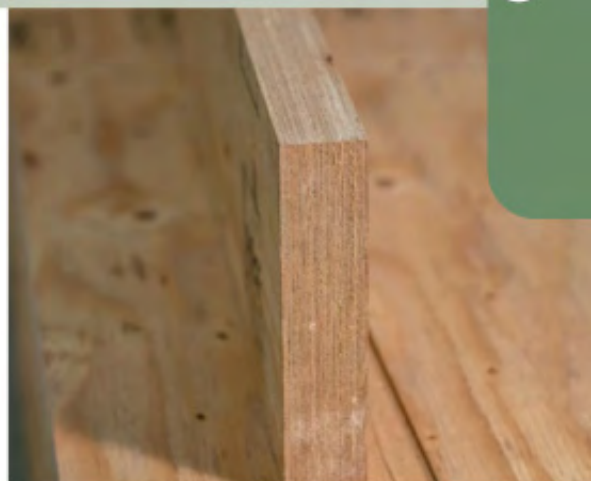

POWER COLUMNS

Our Power Columns and Glulam beams deliver the strength and stability required for today's demanding residential and commercial projects.

Available from trusted brands such as Anthony/Canfor and SmartLam, these engineered components are manufactured from high-quality Douglas Fir and Southern Yellow Pine. They provide excellent dimensional stability, superior load-bearing capacity, and the ability to span long distances without intermediate supports.

Brand availability varies by branch - reach out to your sales representative for more information.

SIMPSON**Strong-Tie****Simpson Strong-Tie® Joist Hangers & Connectors**

Engineered wood connectors are designed to strengthen connections in engineered wood applications. These metal (steel) connectors attach engineered wood members to other members to provide overall support to any structural system.

Whether you're working with traditional framing, engineered LVLs, or custom cedar timbers, we'll match you with the right hardware to keep your structure secure and spec-compliant.

OSHA Scaffold Planks

We stock solid-sawn OSHA scaffold planks that meet or exceed load, deflection, and safety standards for jobsite applications.

- 2" x 10" 16' dimensions
- Graded, stamped, and certified for OSHA use
- Ideal for scaffolding, elevated platforms, and heavy-duty workspaces
- Stored indoors to maintain moisture content and reduce warping

Ask us about bulk bundles or regular stocking programs for multi-phase jobs.

**Lock-Deck® Laminated Roof Decking**

Lock-Deck® is a structural laminated decking system used in heavy timber construction and hybrid wood-framed buildings. Manufactured by Disdero Lumber, it's made by face-gluing kiln-dried lumber laminations and offsetting the center ply to form a tongue-and-groove profile — creating a product that's both structurally robust and visually appealing.

Each plank is composed of 2 to 5 kiln-dried laminations, bonded with a waterproof exterior adhesive to ensure long-term stability and performance. Lock-Deck is commonly used in ceilings, roofs, balconies, mezzanines, and floor systems, delivering the warmth of natural wood with the strength of engineered timber.

It's available in nominal sizes from 3x6 to 5x8, in species including Douglas Fir/Larch, Inland Red Cedar, Ponderosa Pine, and Southern Yellow Pine. Three grades are offered:

- Industrial (non-appearance)
- Decorative (high-end stock, used in 95% of applications)
- Supreme (clear face)

Boards are edge- and end-matched, with options for smooth or textured faces, V-joint or square edges, and factory prefinishing. Standard lengths range from 6' to 16', with specified tallies available and extended lengths up to 32' using structural end joints.

Stocked Item:

- 3x6 nominal (2-3/16" x 5-1/4" actual)
- Douglas Fir/Larch, Decorative Grade
- Smooth Face, EV1S, Center Matched, End Matched, Random Lengths

For more details and installation guidance, visit www.lockdeck.com

ROOF-DECK & FLOOR-DECK

KD Doug Fir Select Decking: Excellent product run from Select Structural Stock. Good choice when being used with our Douglas Fir timbers. Loft Grade. Available 2"x6", 2"x8", 2"x16" – 12' & 16'.

KD Euro Spruce: A good quality economical decking. Loft Grade. Available 2"x 6"– 12' & 16'.

KD Southern Pine: #1 Prime. Loft Grade available in 2"x 6" and 2"x 8"– 12' & 16'.



TECHNICAL SUPPORT & DESIGN FROM OUR IN-HOUSE EWP DESIGNERS


Hood Distribution utilizes IStruct Software's isDesign and isPlan tools – essential for efficient structural design and layout planning:

- **isDesign:** This powerful tool is perfect for sizing I-Joists or LVL one at a time. With the ability to apply loads, handle various engineering requirements, and incorporate mechanical penetrations into single members, isDesign ensures accurate structural analysis. It also generates detailed engineering reports and calculation sheets, streamlining your workflow.
- **isPlan:** The layout and placement solution from IStruct Software, isPlan allows you to draw precise layouts tailored to your project needs. Real-time product analysis and 3D capabilities ensure you're always on track. It is highly customizable for various companies and situations, and can generate calculation sheets and detailed placement drawings.

Additionally, we provide our customers with single design and full placement plan technical services at our Ayr, MA; Milton, VT; Nashville, TN; and Dallas-Fort Worth, TX locations. As an added bonus, each plan includes a unique QR code that you can scan with your phone while in the field. Scanning the code opens a virtual 3D model of your drawing, providing a clearer understanding of the design and helping you troubleshoot more effectively.

For any technical inquiries or support, feel free to reach out directly to our Engineered Wood Products department at HoodEWP@HoodDistribution.com, or contact your nearest location for personalized assistance.

For expert guidance and assistance, contact your nearest EWP Support Group today.

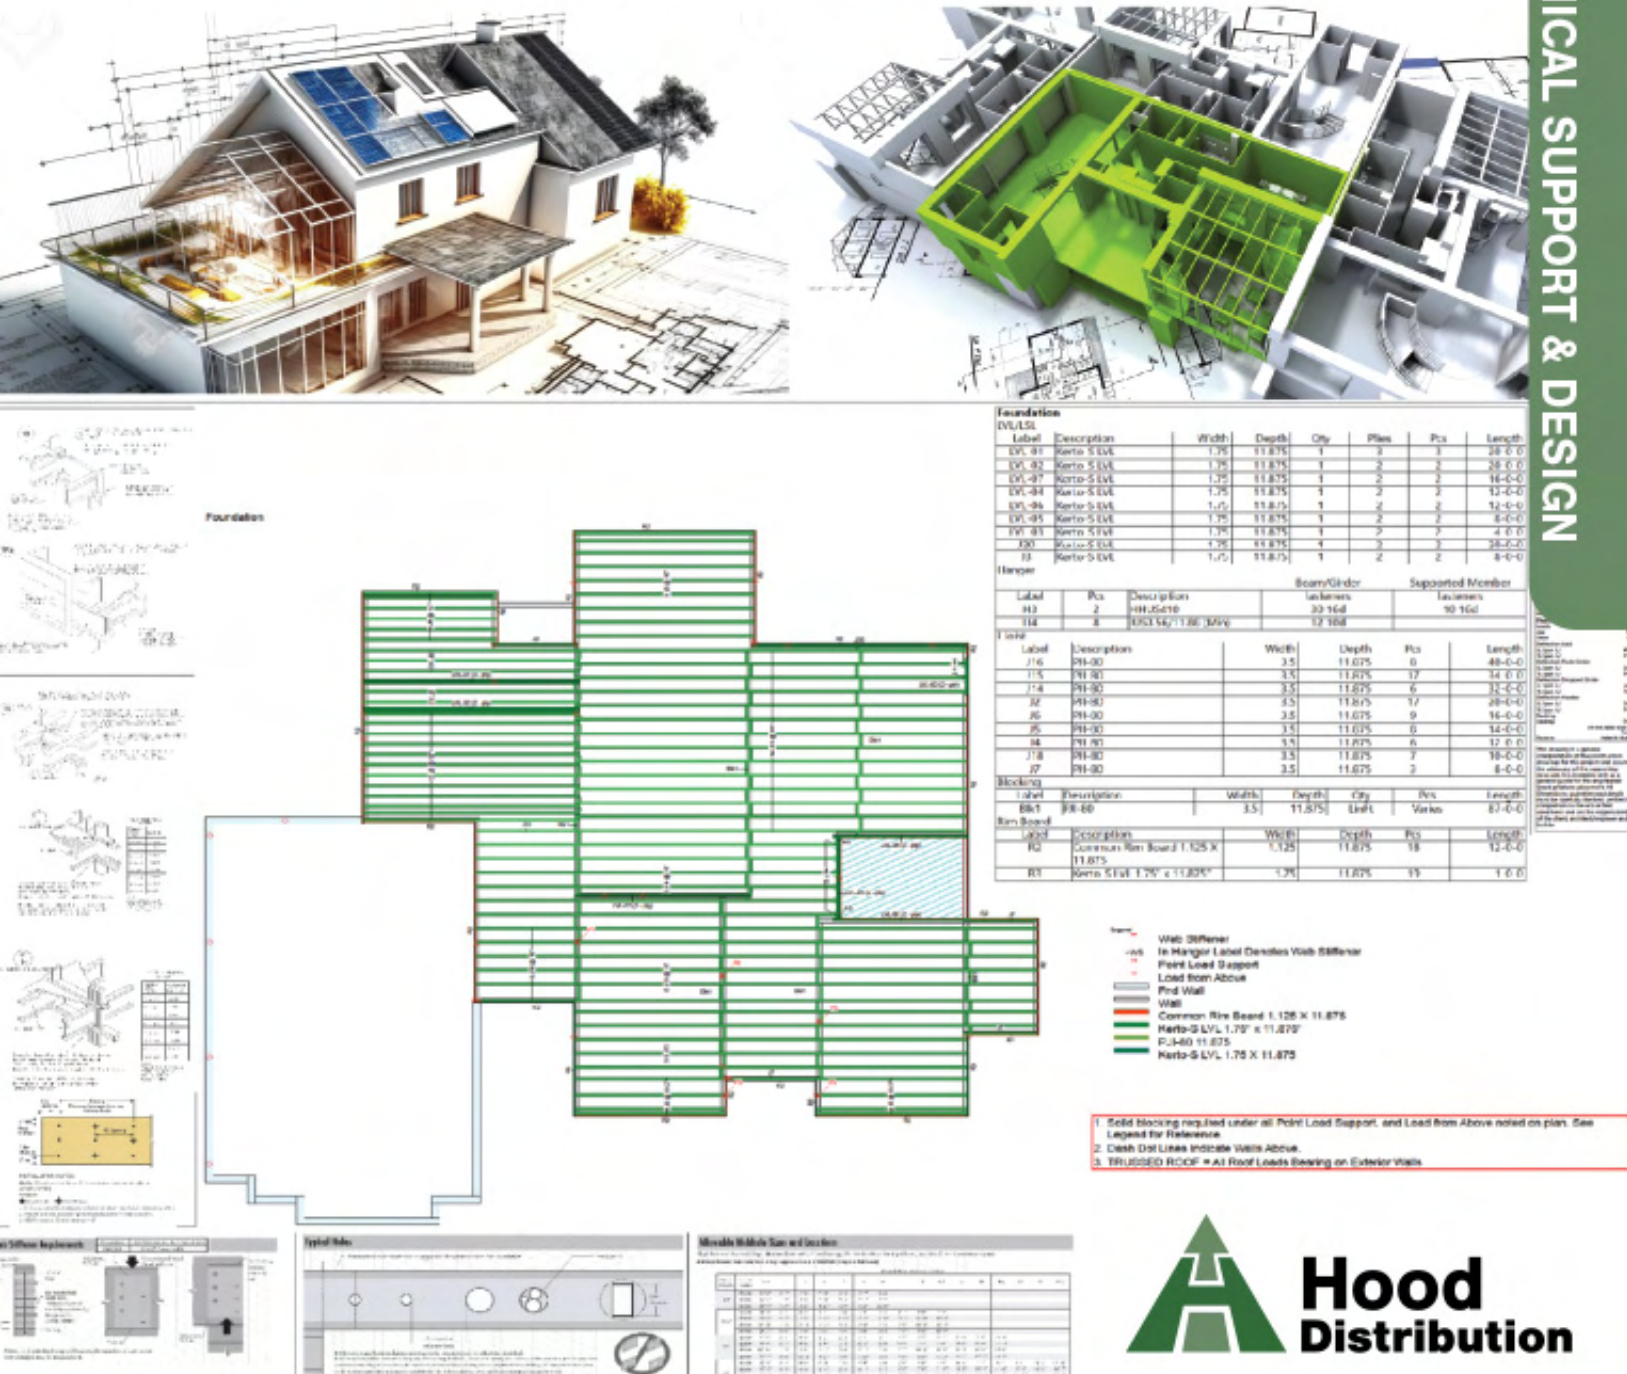

TECHNICAL SUPPORT & DESIGN

HARDWOOD LUMBER



HARDWOOD S4S BOARDS

At Hood Distribution, we understand that the foundation of any great wood product begins with the lumber itself. That's why our hardwood S4S boards are sourced from Northern Appalachia — one of the richest regions in the world for premium hardwood timber. Known for its slow-growing forests and skilled craftsmanship, this area produces lumber that is both visually stunning and remarkably consistent.

Consistency is at the core of what makes this material exceptional. Many of the mills own most of the timberland located within a 100-mile radius, allowing for uniform processing, drying, and milling — so customers receive the same quality product, time after time. The result is a clear-faced board with a smooth finish, offered in random even lengths.


The natural color of Appalachian hardwoods is another standout feature. Because of the shorter growing seasons in the region, the trees absorb fewer minerals from the soil. This helps preserve the true tones of each species — whether it's the soft, creamy hues of poplar or the rich, deep reds of cherry.

Our hardwood boards also meet the rigorous standards defined by the Appalachian Standard — a mark of sustainability, quality, superior yield, and American craftsmanship. It's not just a standard; it's a benchmark that sets Appalachian hardwoods apart in the marketplace.

Available Sizes:

Poplar	1x4 - 1x8	500' units
Poplar	1x10 - 1x12 and 5/4x4 - 5/4x12	250' units
Red Oak	1x4 - 1x12 and 5/4x4 - 5/4x12	250' units
White Oak	1x4 - 1x12	250' units
Maple	1x4 - 1x8	250' units
Cherry	1x4 & 1x6	250' units
Primed Solid Poplar	1x4 - 1x5	500' units
Primed Solid Poplar	1x10 - 1x12 and 5/4x4 - 5/4x12	250' units

To explore more product offerings, go to www.HoodDistribution.com

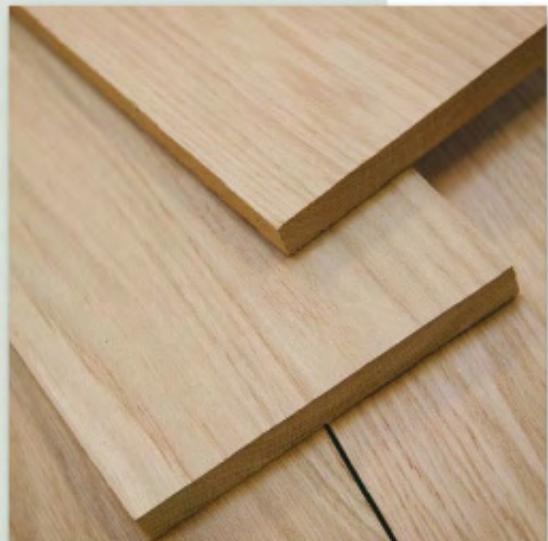

PRECISION MOULDING, TAILORED TO YOUR VISION

At Hood Distribution, we don't just distribute mouldings - we manufacture them with precision and purpose. Our high-capacity moulders allow us to create custom and stock profiles that elevate every project, from timeless trim packages to complex, architect-driven designs. Whether you need a few hundred feet or a full truckload, our team delivers consistent quality on time, every time.

With an extensive library of standard profiles and the ability to run fully custom knives, we meet the exacting needs of builders, millwork shops, architects, and designers. Our craftsmen ensure every run is cut, surfaced, and detailed to your specifications, whether you're replicating historic mouldings or creating a completely new look.

The Hood Difference:

Advanced Moulder Technology: Our multi-head, top-of-the-line industrial moulders produce crisp, clean lines with exceptional surface finish—minimizing downstream sanding or prep.

Custom Knife Grinding: In-house tooling capabilities mean we can match existing profiles or design new ones with speed and accuracy.

Flexible Runs: From small-batch custom work to large-volume orders, we scale production to fit your schedule and project size.

Material Options: We source premium hardwoods and softwoods to suit both paint-grade and stain-grade applications.

Value-Added Services: With straight-line ripping, gang ripping, planing, and edge-gluing capabilities, we deliver fully prepared blanks that reduce waste and save time in your shop.

Profiles with Possibility: From crown, base, and casing to panel moulds, chair rails, and intricate architectural details, we offer hundreds of standard profiles and unlimited potential for custom solutions. If you can draw it, we can make it.

WALL & CEILING PANELING - OVER 20 PROFILES IN STOCK



CASINGS - OVER 10 PROFILES IN STOCK



BASES & CAPS - OVER 50 PROFILES IN STOCK



FLOOR & DECKING - OVER 15 PROFILES IN STOCK



SIDING PROFILES - OVER 15 PROFILES IN STOCK



CROWN MOULDING - OVER 30 PROFILES IN STOCK



Alder

4/4, 5/4, 6/4, & 8/4

Cabinet Grade; Premium Frame/Rustic Grade
Superior One Face; Superior Grade

Alder is concentrated in and cut from the Western faces of the Cascade Mountains in the states of Washington and Oregon. Alder is light reddish brown in color with a very fine or even texture. The grain pattern is very similar to Cherry and Soft Maple.

Ash

4/4, 5/4, 6/4, 8/4

FAS1F; #1 Common

Ash is typically sorted and purchased to be "white" in color and medium in texture. While known for its stability, this lumber's wild open grain can provide a very attractive and unique appearance when finished. Natural or Brown Ash is also available and is often referred to as Cabinet Ash.

Basswood

4/4, 5/4, 6/4, 8/4, 10/4 & 12/4

Select & Better; #1 Common

Basswood is very light in weight and roughly half the density of Oak. It is known for its work ability and is often used in place of or in conjunction with Hard & Soft Maple and Birch due to its creamy white appearance. Basswood is very desirable among carvers and turners.

Birch

4/4, 5/4, 6/4, & 8/4

Select and Better; #1 Common

Birch is a relatively dense wood with a closed tight grain. This makes for a very stable and strong material offering; however, difficulty in machining sometimes becomes an issue. The majority of Birch that is yielded from cuts is light tan to light yellowish brown in color and is commonly known as "Yellow Birch". Birch trees are not large in size, therefore long lengths and wide widths are not readily available.

Cedar, Aromatic Red

4/4

#1 Common

Cedar is typically knotty and red in color with the sapwood being pale tan to white. Aromatic Cedar lumber averages 5 inches in width and 8 feet in length. It produces an odor that is extremely offensive to moths, but very pleasing to humans.

Cedar, Western Red

STD/BTR S1S2E Boards

Cedar Timbers

Bevel Siding

Shakes & Shingles

Western red cedar is light in weight and durable under exposure to rain and sun, heat and cold. The wood stains, machines and seasons very well. Red cedar has a reddish brown heartwood that oxidizes to a dull brown upon exposure to the elements.

Cherry

4/4, 5/4, 6/4, 8/4, 10/4, 12/4 & 16/4

Select and Better; #1 Common

The finest Cherry is grown and sawn in the Northeastern portion of the United States. Cherry is very easy to machine and finishes very nicely. It has a tight, slightly swirling but unassuming grain. The more desirable heartwood is reddish brown in color while the sapwood has a light yellow shade. Cherry has long been a leading choice among the cabinet and furniture industries.

Cypress, Yellow

4/4, 5/4, 6/4, & 8/4

Select & Better; #2 Common; (Ask about Cypress mouldings, patterns & eastern sawn timbers)

Yellow Cypress is light tan in color and sometimes carries an orange cast. It machines and finishes very well. Yellow Cypress is often used outdoors as well as indoors. It is typically used in the manufacturing of paneling, furniture, and fencing.

*Sinker and Pecky Cypress are available in 4/4 & 8/4 Select & Better***Fir, Douglas**

4/4, 5/4, 6/4, 8/4, 10/4 & 12/4

Mixed Grain or Vertical Grain

C & Better

Available S4S or Rough

Douglas Fir is North America's most plentiful softwood species. It is among the strongest and hardest softwood species. Fir is unique among all softwood species in that it is naturally dimensionally stable, having the ability to season well in position. Douglas Fir possesses a light rosy color that is set off by its remarkably straight and handsome grain pattern.

Hickory/Pecan

4/4, 5/4, 6/4, & 8/4

FAS1F; #1 Common

Hickory and Pecan are considered to be some of the more dense commonly utilized hardwoods. Both are known for their relatively closed grain and reddish brown to light tan color. Hickory and Pecan are used quite extensively in the manufacturing of flooring.

Maple, Hard

4/4, 5/4, 6/4, 8/4, 10/4, 12/4, & 16/4

Select & Better; #1 Common; 4/4 Brown (paint grade)

Select & Better

Hard Maple is a very popular and widely utilized hardwood. It is very dense and is generally pale tan in color. Hard Maple has a wide variety of common uses. Among them are flooring, cutting surfaces, fixtures, and furniture.

Maple, Soft

4/4, 5/4, 6/4, 8/4, 10/4, & 12/4

Select & Better; #1 Common

Soft Maple possesses many of the same general characteristics as Hard Maple. However, it is not nearly as dense or strong. Soft Maple is medium in density with a fine texture and close grain. It has excellent machining and finishing properties. The heartwood varies from pale to reddish gray and the sapwood is white to off white. Soft Maple is predominately used in the construction of cabinetry and in the manufacture of a wide variety of moulding profiles for both paint and stain applications.



Oak, Red

4/4, 5/4, 6/4, 8/4, 10/4, 12/4, & 16/4

Appalachian, Southern, & Northern stock

FAS1F; #1 Common

(Quarter Sawn & Rift Sawn also available)

Red Oak is one of the better known and most widely used species of wood in the United States. Red Oak is very hard; however, it machines, stains, and finishes quite well. Red Oak varies in color from light pink to light red. It has been a top choice in the cabinet and furniture industries for years.



Oak, White

4/4, 5/4, 6/4, 8/4, 10/4, 12/4, & 16/4

FAS1F; #1 Common

(Quarter Sawn & Rift Sawn also available)

White Oak more dense than Red Oak and possesses a more even texture. Therefore, White Oak is easier to work and finish in comparison to Red Oak. Due to the abundance of tyloses in the pores of White Oak, it can be used in certain exterior applications. White Oak can be very light grey to very light tan in color. White Oak is a favorite choice for architectural millwork.



Pine, Eastern White

4/4, 5/4, 6/4, & 8/4

Furniture Grade (Knotty); C & Better

1x4 thru 1x12 S4S; Standard & Premium; D & Better;

Clear Finger-joint

Eastern White Pine is very soft in texture, light weight, and light in color. It is pale yellow to a light cream in color. It machines and glues very well. Eastern White Pine is used for cabinetry and millwork.



Pine, Ponderosa

4/4, 5/4, 6/4, & 8/4

C & Better; Moulding Grade; 1x12 S4S; #2 & #3 Common

Ponderosa Pine is a very stable wood and machines extremely well. It is light weight with a straight grain and even texture. The heartwood is brown to light tan with a white sapwood. Ponderosa Pine is used extensively in the millwork industry in the manufacture of wood windows and doors. It is also a very popular choice for moulding.



Pine, Southern Yellow

1x4 thru 1x12 S4S C & Better & #2 Grade

2x6 thru 2x12 S4S C & Better

Pattern Stock - D & Better & #2 Grade

KDAT Boards & Dimension - C & Better

4/4, 5/4, 6/4, & 8/4 Rough - C & Better

Southern Yellow Pine is a collective term that encompasses several species that grow throughout the South. Usually very coarse textured with highly pronounced growth rings, SYP It is typically brownish-yellow in color and can sometimes have an almost orange tint. While SYP is typically used structurally in the building industry, it is often run into tongue and groove flooring, beaded ceiling, and bevel siding profiles.



Poplar, Yellow

4/4, 5/4, 6/4, 8/4, 10/4, 12/4, & 16/4

FAS1F; #1 Common

Yellow Poplar is probably considered the most valued of all the hardwood species because of the abundance of supply and versatility. It is reasonably stable and machines and glues quite well. Poplar has a light to dark green heartwood with a creamy sapwood. It is used extensively as both a paint and stain grade moulding.



Spruce

1x4 thru 1x12 #2 S4S

Spruce is a member of the pine family and is closely related to fir. Spruce machines relatively well and maintains excellent stability. The heartwood is light tan to reddish brown with sapwood being off-white.



Walnut

4/4, 5/4, 6/4, 8/4, 10/4, 12/4, & 16/4

FAS1F; #1 Common

Walnut has been a popular choice among woodworkers for many years. It machines and glues very well and is extremely stable. The heartwood is brown to black and the sapwood is basically white. Walnut is one of the few woods that actually lighten (instead of darken) with age. Walnut is used extensively in the manufacturing of fine furniture and cabinetry.



Photos courtesy of NWH.

ACCOYA® Acetylated Wood

4/4 - 16/4

Accoya® Wood is a high-performance, sustainably sourced treated pine known for its exceptional stability and durability. Naturally resistant to rot, swelling, and insect damage, Accoya performs beautifully in even the harshest environments. Available in Natural or Grey finishes, it offers a sleek, contemporary look with minimal maintenance requirements—perfect for decking, cladding, and other exterior applications where longevity and aesthetics matter.

Ipe'*Clear Decking available*

1x4 thru 1x12 & 5/4x6" Eased 4 Edges

2x4 thru 2x12

4x4 Posts

Ipe' is great for outdoor applications due to its resistance to decay and low maintenance characteristics. Ipe' carries a Class A fire rating and is many times harder than treated pine. The heartwood is olive brown and contrasts dramatically in color to the yellow-grey to grey-brown sapwood. Ipe' is primarily utilized in the construction of decks, docks, marinas, and boardwalks.

Mahogany, African

4/4, 5/4, 6/4, 8/4 & 12/4

Select & Better

African Mahogany closely resembles Genuine Mahogany in its color and workability. However, the African species does tend to have a prominence of ribbon-figure or "ribbon stripe". African Mahogany is a medium reddish brown color. It is much lighter in color than most expect it to be. However, it dramatically darkens with age. Ribbon stripe African Mahogany is very attractive in its appearance and is a nice choice for cabinetry and furniture.

Padauk*Special Order Item*

Padauk is very hard and coarse in texture with an interlocking grain pattern. It is also commonly known as Vermillion. Padauk is light to dark red in color with contrasting streaks throughout. Padauk is primarily used as an accent wood in upper end cabinetry and furniture.

Purpleheart*Special Order Item*

Purpleheart is also known as and commonly called Amaranth or Violet Wood. It is very hard and can be difficult to work unless the proper tooling is utilized. Purpleheart has a relatively straight grain with a medium texture and is very deep rich purple color. The color will turn dull brown over time if left raw or unsealed.

Cedar, Spanish

4/4, 5/4, 6/4, 8/4, 10/4, 12/4, & 16/4

Premium Select

Select and Better

Spanish Cedar is closely related to and resembles Mahogany; however, it is lighter in weight and the grain pattern is more coarse and softer in texture. It is a relatively stable wood that machines very well with standard woodworking tools. Spanish Cedar is resistant to decay and dry wood termites which makes it a popular choice for exterior applications. The more desirable grades are primarily all heartwood with a pale brown to light pink tint.

Jatoba

4/4, 5/4, 6/4, & 8/4

Select & Better

Jatoba is a very hard and durable wood with excellent shock resistance. It is oftentimes referred to as Brazilian Cherry. Jatoba is reddish brown in color with a faint golden glow. Jatoba lumber is primarily used for flooring, furniture, and tool handles.

Mahogany, Genuine

4/4, 5/4, 6/4, 8/4, 10/4, 12/4, & 16/4

FAS1F

Mixed Grain & Pattern Grain

Genuine Mahogany is the premier choice among the wood workers of the world. It is moderately dense. The strength factor of the specie is very high in relation to its physical weight. Genuine Mahogany is a very stable and durable wood that machines and finishes exceptionally well. It is medium reddish brown in color and dramatically darkens with age. Genuine Mahogany is extensively utilized in the furniture and cabinet industries.

Pine, Radiata

1x2 thru 1x12 S4S

C & Better

Moulding Blanks; Finger Joint; Primed & Unprimed; Select Patterns

Radiata Pine is a softwood tree, however, it is harder (denser) than several hardwood species. The tree is native to the United States. However, Radiata Pine is now more widely known to be an import wood versus being sawn and distributed domestically. Radiata Pine is used extensively for mouldings, shelving, and interior trim boards as it paints very well.

**Red Grandis
(Eucalyptus Grandis)**

4/4, 5/4, 6/4, & 8/4

FAS1F; Premium; #1 Common

The specie offers a straight grain and a consistent medium pink color that can be finished to resemble other fine wood species. Red Grandis is a top quality solid wood product. It is ideally suited for high end applications in residential and commercial use, including furniture, cabinets, mouldings, interior design, doors and windows, satisfying the needs of the most demanding markets.



Sapele

(Great Mahogany or Spanish Cedar Substitute)

4/4, 5/4, 6/4, 8/4, 10/4, 12/4, & 16/4

Select & Better Grade

Mixed Grain and Quarter Sawn

Sapele closely resembles African Mahogany in appearance, however, it is harder and heavier. The species has an interlocking grain that is often wavy in appearance. Sapele is a medium reddish brown color with a medium texture, carrying the typical Mahogany look and color. Sapele finishes well and machines relatively well.



Sipo/Utile

4/4, 5/4, 6/4, & 8/4

Select & Better

Sipo is another African import species that is an excellent substitute for Genuine Mahogany. Compared to other substitutes, Sipo's workability is closest to that of Genuine Mahogany. The heartwood contains uniform red, brown color with a well defined sapwood. Sipo is most often used in exterior applications due to the rot resistance characteristics.



Teak

4/4 & 8/4

(Other thicknesses are special order)

FEQ (First European Quality) Grade

Among industry professionals, Teak is considered one the most valuable and beautiful species in the world. It is very strong, hard, and durable. Teak naturally contains oil silicates that act as a preserver to the elements in salt water environments. It is a very stable, straight grained wood that machines reasonably well with the proper equipment. Teak varies in color from yellow to brown and darkens with exposure to the elements. Because of its natural traits, Teak has a history of extensive use in the ship building industry.



Torem

1x4 & 5/4x6

Torem Wood combines natural beauty with superior durability. Sourced from sustainably managed forests, Torem offers a tight, consistent grain pattern and rich, warm tones that enhance any outdoor living space. Naturally resistant to decay and insect damage, it's engineered to stand up to harsh weather while maintaining its strength and color over time. Easy to work with and finish, Torem is an ideal choice for premium decking projects.



Wenge

4/4 Select & Better

Wenge is a very hard, durable, and dimensionally stable wood. It machines and finishes very well. Wenge is dark chocolate to almost black in color. Wenge has long been regarded as one of the premier choices for wood flooring.




Zebrawood

4/4 Select & Better

Zebrawood is very heavy and hard and uniquely striking in its appearance. It has a coarse texture and is light gold in color with streaks of dark brown to almost black running throughout. Zebrawood is primarily used in conjunction with other woods as an accent due to its unique appearance.




Photos courtesy of NMH.

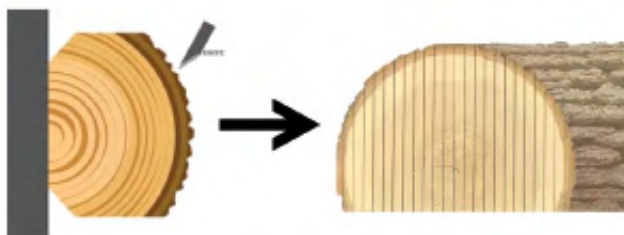


Plain Sawn

Plain sawn lumber is also commonly referred to as "flat sawn". This is the most common and widely used method of sawing. Plain sawn lumber is produced by making the first cut on a tangent to the circumference of the log. Each additional cut is then made parallel to one before. This method produces the widest possible boards with the least amount of log waste. Therefore, it is more economical in comparison to the other sawing techniques utilized within the industry. Plain sawn lumber offers a distinct cathedral effect to the grain on the face of the boards.

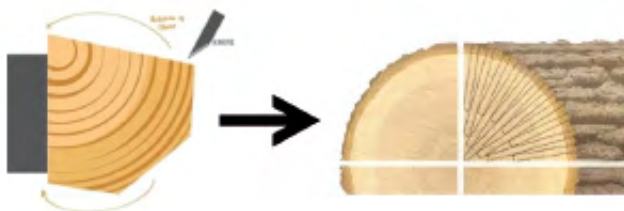

Rift Sawn

The technique of rift sawing is very similar to that of quarter sawing, producing similar limitations and advantages. During rift sawing, the quartered log portion is turned slightly off perpendicular before cutting so as not to expose the medullary ray in an effort to minimize the amount of "flake" on the face of the board. Rift sawing produces a virtually straight grain appearance on the face of the board with little to no visible "flake". The rift sawing technique also produces a measurable amount of log waste and yields narrower boards in relation to plain-sawn lumber.

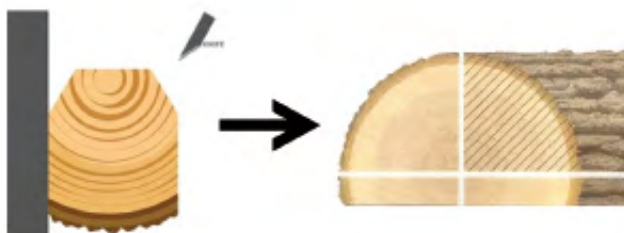

Quarter Sawn

Quarter sawn lumber is produced by first quartering the log followed by sawing it perpendicular to the annual growth rings. This particular method of sawing produces a nice straight grain appearance on the face of the board. In many species, this technique of sawing makes the medullary rays visible on the face of the board in the form of "flake". In Mahogany, this technique produces what is commonly known as "ribbon stripe". Quarter sawn lumber creates more log waste and therefore the end result of narrower boards in relation to plain sawn technique.



Hood Distribution is Forest Stewardship Council® (FSC®) Chain of Custody (CoC) certified. The FSC certification provides a credible link between production and consumption of forest products, enabling consumers and businesses to make purchasing decisions that benefit people and the environment as well as providing ongoing business value. As a multi-stakeholder organization, FSC applies the directive of its members to develop forest management and chain of custody standards, deliver trademark assurance and provide accreditation services to a global network of committed businesses, organizations and communities.

Long standing relationships with reputable sawmills that possess the same initiatives as Hood Distribution afford us the ability to meet your certified wood requirements.

FSC Certified materials are available upon request.

LUMBER GRADE RULES

	FAS	PRIME	F1F	SELECT	#1 COMMON	FAS LIMITS	
Minimum Size Board	6" x 8"	5" x 7"	Same as FAS for species being graded	4" x 6"	3" x 4"	Pith – SM in Inches Wane – 1/2 Length	Wane in FAS1F: FAS transmission applies to Better Face
Minimum Size Cutting	4" x 5" 3" x 7"	4" x 5" 3" x 7"	BETTER FACE TO GRADE FAS		4" x 2" 3" x 3"	Knot – 1/3 SM	#1 Common Side: 1/3W or 1/2L. Widest wane added together: Length can be on both edges.
Basic Yield	SM x 10 83-1/3%	SM x 10 83-1/3%			SM x 8 60-2/3%	Warp – Entire board must be flat enough to S2S to S.S.T.	
Formula to Determine Number of Cuts	$\frac{SM}{4}$ (4 max.)	$\frac{SM}{4}$ (4 max.)			$\frac{SM+1}{3}$ (5 max.)	Splits – Not to exceed 2x SM or 12", whichever is greater	Wane in Selects: Pcs 6" & Wider – Fas Limitation applies to Better Face.
SM Needed to Take Extra Cutting	6-15' SM	6-15' SM	POOR FACE TO GRADE #1 COMMON		3-10' SM	Splits shall not diverge 1" in 12"	#1 Common Side: 1/3W or 1/2L. Widest wane added together. Add widest wane together. Add total length of wane from both edges.
Extra Yield Needed for Extra Cutting	SM x 11 91-2/3%	SM x 11 91-2/3%			SM x 9 75%	First Lineal Foot Rule: Applies to both ends of board, to contain not over 25% unsound wood. Prime lumber is to contain not over 10% unsound wood.	
Special Yields	97% Rule 2 cuts full width any length; Pcs 6" and wider with 6-12" SM SM x 11.64 for Yield	Splits – Not to exceed 1x SM or 12", whichever is greater	97% Rule on Better Face	2 + 3 SM to be 100% clear or SM x 11 in one cutting on Better Face 97% Rule	1' SM-100% 2' SM SMx9		

PLYWOOD & COMPOSITE PANELS



Photo courtesy of Finest Fabrications

COLUMBIA FOREST PRODUCTS HARDWOOD PLYWOOD PRODUCT LINE AND SPECIFICATIONS



Thickness: 1/4", 1/2", 3/4" & 1"

Sizes: 48.5 x 96.5 (Standard) or 48 x 96

Rotary Species: Birch, Maple and Red Oak. (All whole piece face grades purchased for a higher value panel)

Plain Sliced Species: Cherry, Hickory, Clear Pine, ID Knotty Pine, Walnut (plain sliced, quartered cut and rift available)

- Other species and veneers are available by special order

Face Grades: A, B, C, D and Rustic (UV finish can be applied to any panels)

Back Grades: 1, 2, 3, 4

Cores Available: 1) Veneer Core (Aspen, Poplar and Tulip)

Unit Sizes: 1/4" - 72 Sheets

1/2" - 54 Sheets

3/4" - 36 Sheets

1" - 18 Sheets

Glue Types: ULEF (CARB PHASE II) and NAUF

COLUMBIA FOREST PRODUCTS COMPETITIVE ADVANTAGE

- Meinan-peeled hardwood crossbands offer a much smoother face
- Hardwood crossbands beneath the face and back reduce the potential for core "telegraphing."
- Quick lead times - 2 weeks or less
- Meets TSCA and CARB standards



Birch



Cherry



Hickory



Knotty Pine



Red Oak



Walnut



White Oak



EX-Cel® Classic Sheets and Trimboards

EX-Cel® Classic Sheets and Trimboards bring versatility and lasting performance to any project. Perfect for custom millwork, arch window trim, soffits, porch applications, fascias, and other accents, these high-density PVC products cut, route, and mill as easily as plywood while delivering superior consistency. Like all EX-Cel® products, they're resistant to moisture, salt, and insects, ensuring long-term durability. Available in smooth finishes, 1/2" - 1" thicknesses, 4x8 and 4x10, and Bright White color, you can achieve picturesque trim and curb appeal without painting, or choose to paint for a custom look. EX-Cel® provides the quality, flexibility, and lifetime value your home deserves.



Fir Plywood, Marine Grade

1/4", 3/8", 1/2", 3/4" & 1" A-B

4'x8' veneer core full thickness panels constructed of slow growth inland Douglas Fir and Western Larch to yield fine-grained, smooth faces. All back and inner plies are a "B" grade or better and will be full length. The edges of the panel will not have any cross-band gaps or edge splits in excess of 1/8". Larger panel sizes and tongue & groove (5/8th and thicker) panels are available through special order.



Okoume Plywood, Marine Grade

4mm, 6mm, 9mm, 12mm, 18mm & 25mm Marine 1088

The British Standard (BS) 1088 specification is a marine plywood spec that applies to plywood produced with untreated tropical hardwood veneers with a set level of resistance to fungal attack. The plies are bonded with WBP glue, which has been proven to be highly resistant to weather, micro-organisms, cold and boiling water, steam, and dry heat. Face and core requirement are stringent - the moisture content of the panel must be between 6% and 14% when it leaves the factory.



PlyONE Underlayment

5.5mm 4x8

Veneer Core

This standard underlayment is a 5-ply construction with a 5.5mm (net 5.3mm) thickness and .3mm faces. This panel is made from Radiata Pine.



Meranti (Lauan)

5.2mm OVL & BTR Exterior



Ayer

800-752-0129
91 Fitchburg Road
Ayer, MA 01432

Baltimore

888-728-4969
18450 Showalter Road, Hangar A
Hagerstown, MD 21742

Birmingham

833-247-2969
210 Finley Avenue, Building 7
Birmingham, AL 35204

Cincinnati

800-745-1778
2525 Commodore Drive
Sharonville, OH 45241

Cleveland

800-745-1778
6550 Davis International Parkway
Solon, OH 44139

Columbus

800-745-1778
991 Distribution Drive
Columbus, OH 43228

Dallas

888-247-1950
8932 South Freeway
Fort-Worth, Texas 76140

Detroit

800-745-1778
13250 Stephens Road
Warren, MI 48089

Durham

860-349-1781
85 Skeet Club Road
Durham, CT 06422

Greenville

800-234-8865
1925 Perimeter Road
Greenville, SC 29605

High Point

800-334-4773
5037 Prospect Street
High Point, NC 27263

Indianapolis

800-745-1778
5025 State Road 267, Suite 150
Lebanon, IN 46052

Jacksonville

800-346-0922
5311 Doolittle Road
Jacksonville, FL 32254

Louisville

800-770-2590
901 Park Place
New Albany, IN 47150

Memphis

800-238-7598
4060 Pilot Drive
Memphis, TN 38118

Millersburg

800-745-1778
7580 Ohio State Route 241
Millersburg, OH 44654

Milton

800-955-2677
67 Catamount Drive
Milton, VT 05468

Mobile

800-633-1230
6030 Rangeline Road, Building 5
Theodore, AL 36582

Nashville

800-523-2840
2801 Murfreesboro Pike
Antioch, TN 37013

Orlando

800-432-4559
7806 Apopka Boulevard
Orlando, FL 32703

Raleigh

800-552-6339
4725 Auburn-Knightdale Road
Raleigh, NC 27610

Tucson

800-844-5708
501 South Toole Avenue
Tucson, AZ 85701

Pittsburgh

800-745-1778
1 Dorrington Road
Carnegie, PA 15106

Hood Industries, Inc. Corporate Office

601-264-2962
1978 Hood Boulevard, Suite 100
Hattiesburg, MS 39401